

## Description


The Coiled Tubing Centralizer minimizes the natural curvature of the coiled tubing string, allowing the smooth passage of wireline tools, or other equipment through the ID of the coiled tubing. When equipped with a Select Landing Nipple, the beveled guide on the bottom ensures re-entry of suspended recorder instruments.

## Applications

- Used to allow a smooth transition through a coiled tubing ID.

## Features & Benefits

- Large inner diameter.
- Flexible configurations to work with wireline and other equipment.
- Robust design.
- Available in a complete range of sizes.

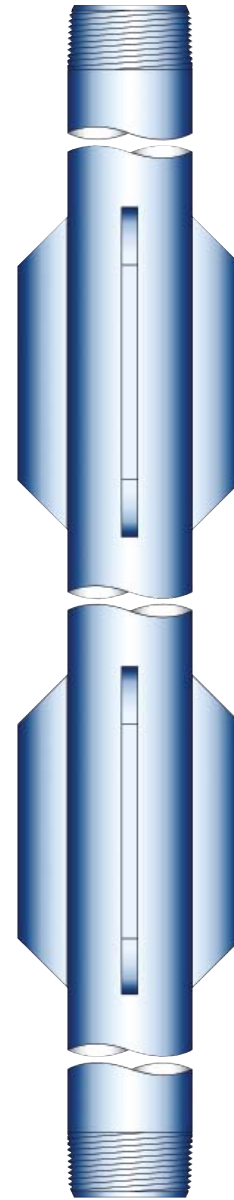

## Specifications

Coiled Tubing Sizes (in. / mm)	Connection (in. / mm)	Body OD (in. / mm)	Tool ID (in. / mm)	Length (in. / m)
0.75 - 2.875 (19.05 - 73.02)	Available in various threads to suit customer requirements	1.9 (48.26)	1.5 (38.1)	60 (1.5)
		2.375 (60.32)	2 (50.8)	60 (1.5)