


GRAPPLE X GRAPPLE CONNECTOR

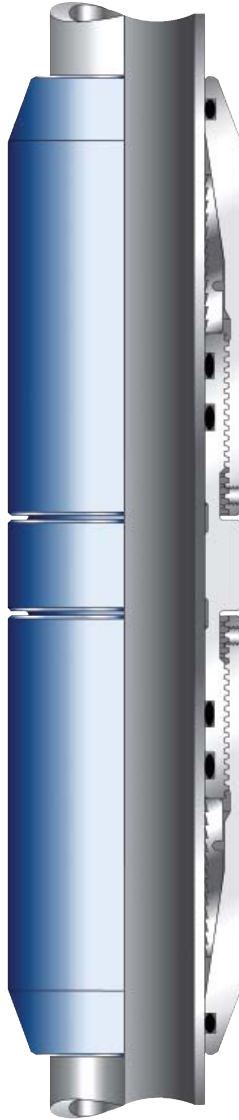

Description

The Grapple x Grapple Connector is used to join two strings of coiled tubing. This connector is designed for use in cases where the spool cannot take all of the coiled tubing required for a hang-off or workover and additional coiled tubing is needed. The first string is run into the well and secured by the slips of the Annular Control Valve. The tubing is cut above the Annular Control Valve and the second string of coiled tubing is then fed through the injector, and the tubing strings are joined with the Grapple x Grapple Connector. Once the connector is installed, the grapple slips are energized by tightening down the grapple cap, which locks securely around the coiled tubing.

Applications

- Connecting two coiled tubing strings together.

Features & Benefits

- Slips provide positive grip on the coiled tubing.
- O-rings provide high-pressure seal.
- Connector ID is equivalent to the tubing.

Specifications

Coiled Tubing Sizes (in. / mm)	Temp. Rating (°F / °C)	PSI (MPa)
1.25 (31.75)		
1.5 (38.10)		
1.75 (44.45)	-40 - 275	2000
2.375 (60.32)	(-40 - 135)	(14)
2.625 (68.69)		
2.875 (73.02)		

Company

Services

CT Completions

CT Surface

CT Sub-Surface

CT Service Tools

Wellheads

Slickline

Engineering Data

Index