

Description


The Select Energy Motorhead Assembly is a compact tool with a multitude of features. Included are dual flapper check valves, circulating sub, and ball activated disconnects. The motorhead is a tool that can be run in conjunction with either Coiled Tubing (with dimple grapple as shown) or on Jointed Tubing.

Features & Benefits

- Run with either Coiled or Jointed Tubing.
- Utilized in for drilling and milling applications.
- Field redressable.
- Dual Flapper Check Valves.
- Robust design.
- Hydraulic ball operated disconnect.
- Dual circulation sub.

Specifications

Tool Size (in. / mm)	Connection (in. / mm)	Tool OD (in. / mm)	Tool ID (in. / mm)	Make up Length (in. / m)
1.69 (42.93)	1.0 (25.4) AMMT	1.69 (42.93)	.406(10.31)	22.42 (.57)
2.88 (73.15)	2.38 (60.33) PAC	2.88 (73.15)	.750 (19.05)	28.78 (.73)
3.13 (79.50)	2.38 (60.33) REG	3.13 (79.50)	.500 (19.05)	34.19 (.87)

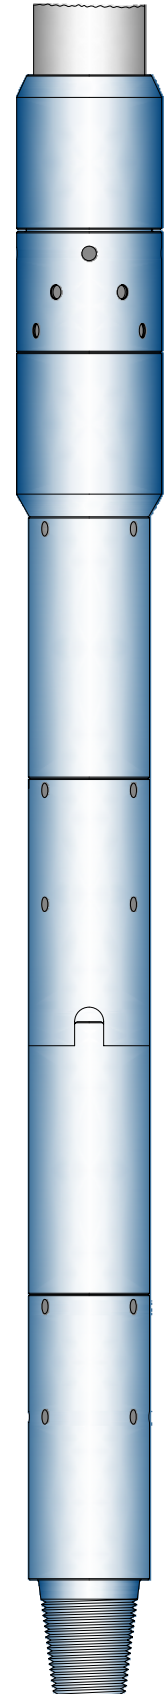

Company

Services

Wellheads

CT Completions

CT Surface

Sub-Surface

Service Tools