

## Description

The Select Energy On / Off Tool enables the tubing string to be disconnected above a packer for zonal isolation, tubing retrieval, and temporary zone abandonment. The neck of the tool contains an internal lock profile for landing a wireline plug to provide zonal isolation below the packer.


This tool has two main components, the overshot mounted on the tubing string and the stinger mounted on the packer. The overshot disengages with either a standard left release or an optional right quarter-turn release. The washover shoe on the overshot cuts through debris allowing for easy engagement of the stinger. The seals in the tool are retrieved with the overshot to enable redressing at the surface.

## Applications

- Mechanical, hydraulic, or wireline-set packer completions
- Temporary abandonment of lower zones
- Zonal isolation above the packer
- Tubing retrieval without disturbing the packer

## Specifications

- Standard Wireline nipple profiles.
- Available in most standard tubing and casing sizes

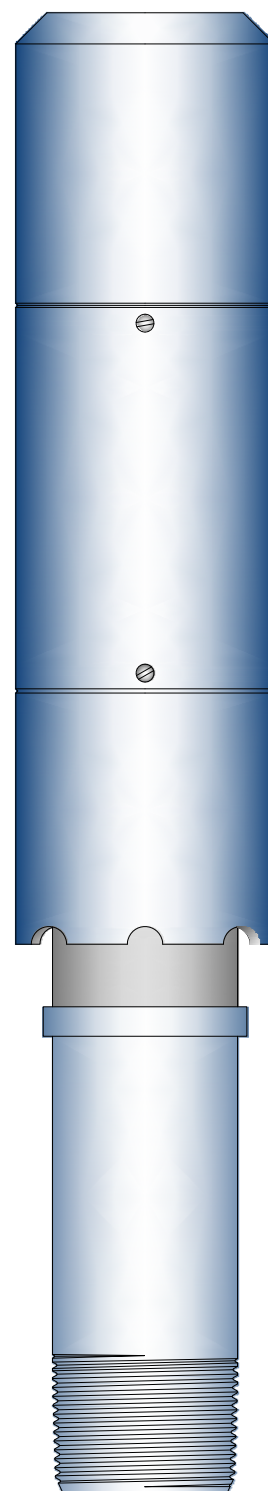

Company

Services

Wellheads

CT Completions

CT Surface

Sub-Surface

Service Tools